


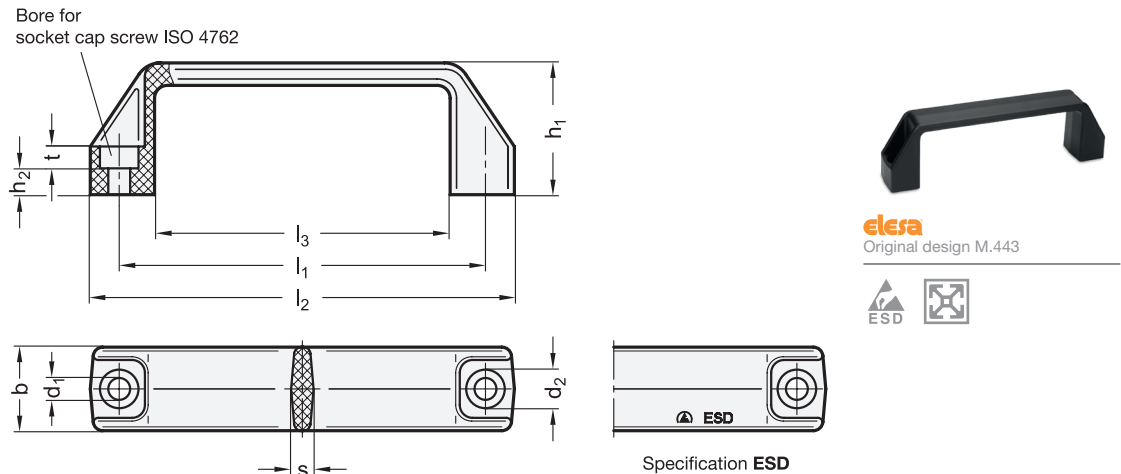

l ₁	d ₁			b	d ₂	h ₁	h ₂	l ₂	l ₃	s	t
	PA / PP	SV	ESD								
94 -1	6,5	6,5	6,5	21	10,5	38	6	109	74	6	7
117 ±1	6,5	6,5	-	26	10,5	41	9	137	93	7	6
117 ±1	8,5	8,5	8,5	26	13,5	41	6,5	137	93	7	8,5
122 ±1	8,5	-	-	26	13,5	41	6,5	142	100	7	8,5
132 ±1	8,5	8,5	-	27	13,5	45	7,5	150	108	7	8,5
140 ±1	8,5	-	-	27	13,5	46	7,5	160	113	7	8,5
160 ±1	8,5	-	-	28	13,5	50	7,5	179	132	7,5	8,5
179 ±1	8,5	8,5	-	28	13,5	50	8,5	196	151	7,5	8,5
235 ±1	10,5	-	-	30	16,5	54	9,5	260	201	8,5	10,5

Specification

1

4

Plastic, Polyamide

PA

• Glass fiber reinforced

• Operating temperature -30 °C to +130 °C

• Color

- Black, RAL 9005, matte finish

- Orange, RAL 2004, matte finish

- Gray, RAL 7031, matte finish

- Red, RAL 3000, matte finish

- Green, RAL 6017, matt finish

● SW

● OR

● GR

● RT

● GN

Plastic, Polypropylene

PP

• Glass fiber reinforced

• Operating temperature -20 °C to +100 °C

• Black, RAL 9005, matte finish

● SW

Plastic, Polyamide (PA)

SV

• Glass fiber reinforced

• Operating temperature -30 °C to +150 °C

• Black, RAL 9005, matte finish

● SW



Plastic, Polyamide (PA)

ESD

• Electrically conductive

Resistance 103 Ω (ASTM D257)

• Glass fiber reinforced

• Operating temperature -30 °C to +130 °C

• Black, RAL 9005, matte finish

● SW

RoHS

Technical Information

Page

ESD basics

QVX

Strength Properties

QVX

Plastic Characteristics

QVX

How to order

1

2

3

4

GN 528-PA-117-6,5-SW

1

2

3

4

Material

l₁

d₁

Color



1.2