


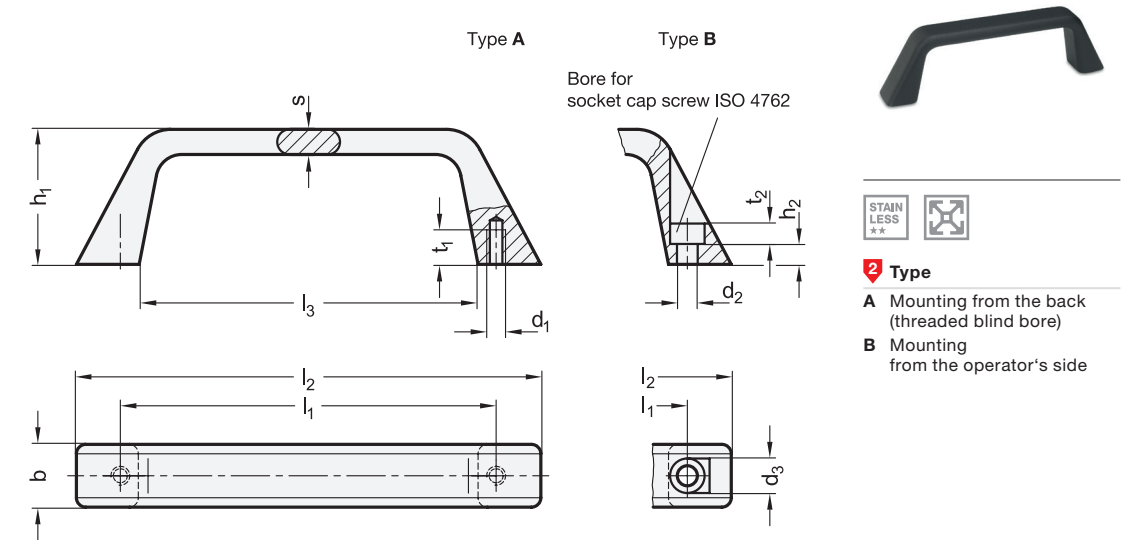

1

l ₁		b	d ₁	d ₂	d ₃	h ₁	h ₂	l ₂	l ₃	s	t ₁ min.	t ₂
GN 728	GN 728.5											
120	120	22,5	M 6	6,4	11	42,5	6,5	147	108	8	10	6,5
180	-	27	M 8	8,4	13,5	47,5	7,5	214	165	10	12	8,5

Specification

3

GN 728

Aluminum die casting

• Plastic coated

- Black, RAL 9005, textured finish

● SW

- Silver, RAL 9006, textured finish

● SR

• Plain finish, tumbled

○ BL

GN 728.5

Stainless steel precision casting AISI CF-8

Matte shot-blasted

RoHS

The installation of cabinet U-handles GN 728 / GN 728.5 can be carried out from the back (type A) as well as from the operator's side (type B).

see also...

GN 528 Cabinet U-Handles (Plastic, Mounting from the Operator's Side)

QVX

GN 528.1 Cabinet U-Handles (Plastic, Mounting from the Back)

QVX

Technical Information

Load Rating Information

QVX

Stainless Steel Characteristics

QVX

How to order (Aluminum die casting)	1	l ₁
	2	Type
	3	Finish
GN 728-120-A-SW		

How to order (Stainless steel precision casting)	1	l ₁
	2	Type
GN 728.5-120-B		