


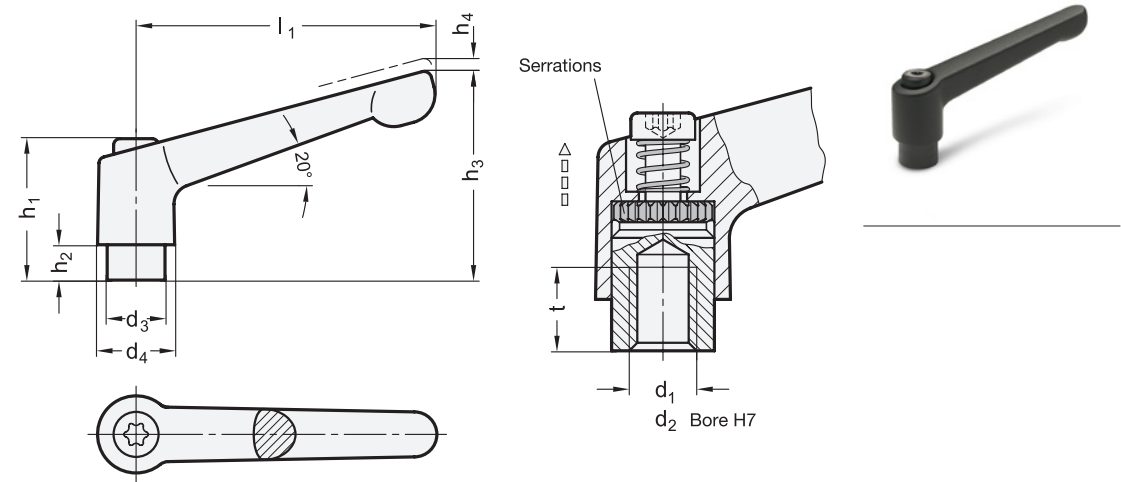

1	2	2										
l ₁	d ₁ Thread			d ₂ H7 Bore		d ₃	d ₄	h ₁	h ₂	h ₃	h ₄ Stroke	t min.
22	M 3	M 4	M 5	B 4	B 5	8	10,5	18,5	2	23	3	5
30	M 3	-	-	-	-	10	13	24,5	4	31	3,5	7
30	M 4	M 5	M 6	B 5	B 6	10	13	24,5	4	31	3,5	9
45	M 4	M 5	M 6	B 5	B 6	10	13	24,5	4	34	3,5	9
63	M 6	M 8	-	B 8	-	13,5	17,5	31	6,5	45	4	11
78	M 8	M 10	M 12	B 8	B 10	16	21	36	8	54	4	14
92	M 10	M 12	-	B 12	-	19	24	43	11	64	4	17
108	M 12	M 14	M 16	B 12	B 16	23	30	50,5	12	75	5	22

Specification

Handle

Zinc die casting

• Powder coated

- Black, RAL 9005, textured finish
- Black, RAL 9005, silk finish
- Orange, RAL 2004, textured finish
- Red, RAL 3000, textured finish
- Silver, RAL 9006, textured finish

• Chrome plated

• Uncoated

Tumbled

- SW
- SZ
- OS
- RS
- SR
- CR
- RH

Insert / Retaining screw

Steel, blackened

RoHS

Adjustable hand levers GN 300 are ideal whenever parts have to be clamped in a confined space or in a particular lever position. The centre insert is connected to the lever via serrations which can easily be disengaged. Pulling the lever, disengages the serrations and allowing it to be swivelled to the ideal clamping position. On releasing the lever the serrations automatically re-engage.

see also...	Page
GN 300 Adjustable Hand Levers (with External Thread)	QVX
GN 300.1 Adjustable Hand Levers (Insert Stainless Steel)	QVX
GN 300.5 Adjustable Hand Levers (Stainless Steel)	QVX
GN 300.4 Adjustable Hand Levers (with Increased Clamping Force)	QVX
GN 302 Flat Adjustable Hand Levers	QVX
GN 303.2 Adjustable Hand Levers (with Releasing Button)	QVX

Technical Information

ISO Fundamental Tolerances	QVX
----------------------------	-----

How to order	1	l ₁
	2	d ₁ (d ₂)
	3	Color (Finish)
GN 300-92-M12-SR		